

**INDUSTRIAL, LABORATORIES, PROCESS, R&D
HIGH VACUUM, IRRADIATION, MAGNETIC FIELDS,
DOWN TO CRYOGENIC TEMPERATURES**

Thermo-Mechanical Instrumentation in the most challenging environments.

Description

The **FOD** optic linear position and displacement transducer is an absolute position transducer. The **FOD** is a completely passive sensor requiring no electrical signal. The **FOD** is completely immune to EMI and RFI and carries no risk of current leakage or ignition. The **FOD** can be located far away from the signal conditioner. These characteristics make the **FOD** well suited for difficult-to-reach locations.

The **FOD Extreme Sensing** is an enhanced design to measure displacement in vacuum, under irradiation, magnetic fields in cryogenic to high temperature environments.

The **FOD Type A** is measuring in a push-pull configuration for contact measurements.

The **FOD Type B** is a non-contact measurement system made of a base sensor mounted on a frame with pulley and wire guide to enable axial or perpendicular exit of the wire.

Our unique design is based on **Fabry Perot interferometer principle**. By connecting this device to a Fabry-Perot fiber optic signal conditioner **EVOLUTION** it becomes an absolute position and displacement transducer.

The use of the **FOD Extreme Sensing** linear position and displacement sensor allows a complete analysis in the most challenging environments.

Key Features

- High resolution
- Intrinsically safe
- Immune to EMI / RFI
- Withstand extreme conditions
 - High Vacuum up to 10^{-8} Torr
 - Irradiation 6 MGy
 - Strong Magnetic fields up to 6 Tesla
 - Temperature
 - down to cryogenic @ 4 K / -269 °C (Type A)
 - up to +200 °C (Type B)
- 1-D displacement
- 3-D displacement compact arrangement (Type B)
- Small Stroke 0 - 20 mm / 0 - 40 mm (Type A / B)
- up to Large Stroke 0 - 250 mm (Type B)
- Push-pull (Type A)
- Non-Contact (wire) (Type B)
- High speed readout 250 Hz


Applications

- Particle Accelerators
- Superconducting Magnets
- Nuclear research facilities
- Tokamak Magnets, Vacuum Vessels and Cryostats
- Telescope, Spatial, Scientific and Medical R&D
- LNG and Chemicals storage, transportation and process infrastructures


Specifications

Linear stroke:	0 - 20 mm; 0 - 40 mm (base push-pull sensor) 0 - 80 mm; 0 - 120 mm; 0 - 250 mm with pulley de-multiplicators
Accuracy:	1 % Full Scale over lifetime with EVOLUTION FPI-HR and down to 0.5 % Full Scale
Resolution:	0.1 % F.S. with EVOLUTION FPI-HR at constant Temperature / Irradiation
Irradiation:	Up to 6 MGy
Temperature - Type A:	-269 °C (4 K) to 80 °C
Temperature - Type B:	-100 °C to 200 °C
Material:	Aluminum (main body); Stainless Steel (moving piston); Aluminium-Bronze (guiding elements) ; Ceramic (sensor tip and wire output guide); Nickel-Chromium (wire). Non-magnetic
Thermal sensitivity	Sensor body, piston, guiding elements: similar to aluminium (CTE $\sim 10 \cdot 10^{-6}$ / K)
Sensor body - Type A	Cylindrical body: FOD sensor 0 - 40 mm stroke (native stroke) overall length 276 mm, body 183 mm x O.D. 19.05 mm
Sensor body - Type B	Mounting frame with pulley system and wire guide: 425 mm x 70 mm x 32 mm (L x W x T) up to 0 - 120 mm stroke 517 mm x 70 mm x 32 mm (L x W x T) 0 - 250 mm stroke
Lead fiber:	MM GI 62.5 μ m core; rad hard; PEEK coating OD 900 μ m, up to 500 m
Mechanical cycling:	> 100'000 cycles

FOD Type A: 0 - 40 mm
base push-pull sensor

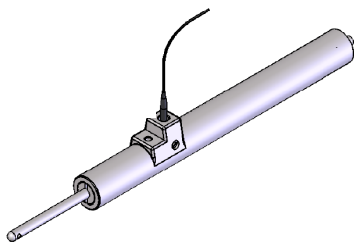

FOD Type B: 0 - 40 mm with
mounting frame and wire guide
for perpendicular cable exit

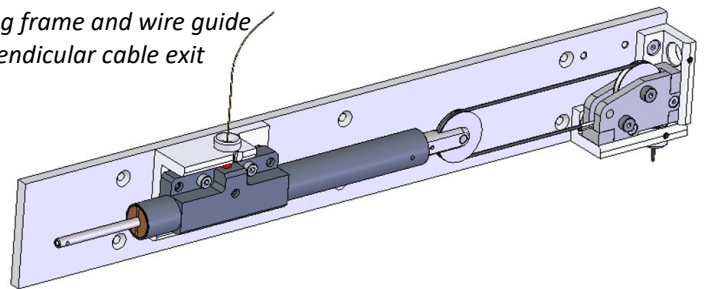

Certification and compliance

- Contact SMARTEC for additional information

Accessories

- Spiral tube on Lead fiber
- Hermetic feedthrough
- Fiber Optic Signal Conditioner EVOLUTION: sampling rate FPI-HR up to 125 Hz / 250 Hz; and FPI-HS up to 15 kHz (*) per channel analog outputs 0 - 5 V or OPTIONAL 4 - 20 mA (16 bits resolution)
(*) Specifications with FPI-HS 15 kHz to be validated

Ordering information

- Estimated length sensor to feedthrough (if any) and / or to signal conditioner
- Sensor name for ID marking on the body